




SPIRAL CONVEYOR

SEVERAL SPIRAL LAYOUTS

INCLINE AND DECLINE

CHAIN WIDTH 83, 140 AND 220 MM

AVAILABLE IN ALUMINUM AND STAINLESS STEEL

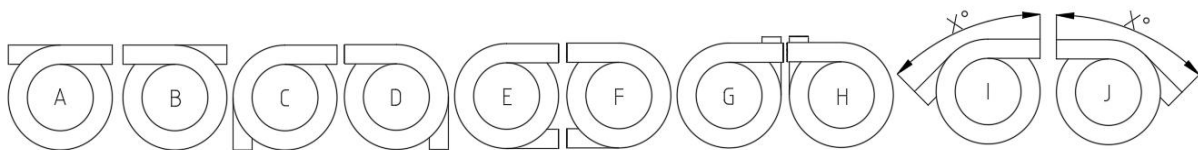

Series	830/530	150/540	220/560
Minimum radius	400mm	400mm	600mm
Maximum radius	Depends on number of turns, radius, load & design (incline or decline)		
Maximum turn	Depends on radius, speed, load & design (incline or decline)		
Max incline & decline	14 degrees	12 degrees	12 degrees
Maximum speed	50m/min *	50m/min *	40m/min *
Maximum load	120kg**	120kg**	120kg**
Working temperature	+ 5 degrees C to + 40 degrees C		

* Depends on number of turns, radius, load & design (incline or decline)

** Depends on number of turns, radius, speed & design (incline or decline). The load must be equally divided over the entire conveyor length.



Carryline spirals S220 Type D -up ↗.



Carryline spiral S530 Type F -up ↗.

LVP Conveyor Systems Ltd.

Unit D2, North City Business Park, Dublin 11, Ireland

T: +353 (1) 8643838

F: +353 (1) 8644925

W: www.conveyors.ie & www.lvpconveyors.co.uk